

Cassetto Frigo Glass Black Glass Black Fridge Drawer

* Tipo Bordolese da 0,75 Lt. / * Calculated with 0.75 Lt. Bordeaux bottles



- .Capacità: 7 bottiglie*
- .Colore: Nero
- .Sistema di raffreddamento: Compressore
- .Refrigerazione: Ventilata
- .Temperatura regolabile:
5, 8, 11, 14 o 17 °C
- .Regolazione elettronica
- .Termometro con display digitale
- .Illuminazione a LED bianchi con interruttore
- .Anta in vetrocamera anti-UV

- .Capacity: 7 bottles*
- .Color: Black
- .Cooling system: Compressor
- .Refrigeration: Ventilated
- .Adjustable temperature:
5, 8, 11, 14 o 17 °C
- .Electronic regulation
- .Thermometer with digital display
- .White LED lighting with switch
- .Anti-UV double glass door



CARATTERISTICHE TECNICHE

- .Classe energetica: G
- .Consumo elettrico annuale: 101 kWh
- .Classe climatica: N
- .Rumorosità: 45 db
- .Voltaggio: 220-240 V
- .Tipo di gas: R600a

TECHNICAL CHARACTERISTICS

- .Energy class: G
- .Annual electricity consumption: 101 kWh
- .Climate class: N
- .Noise level: 45 db
- .Voltage: 220-240 V
- .Gas type: R600a

Dimensioni/Dimensions

Larghezza/Length: 59,7 cm

Profondità/Depth: 59,1 cm


Altezza/Height: 14,1 cm

Peso/Weight: 17,20 kg


Temperatura d'Esercizio: da 16° a 32°C - Ambient temperature: from 16° a 32°C

SCOPE OF DELIVERY


- 1 Cassetto Frigo Glass Black

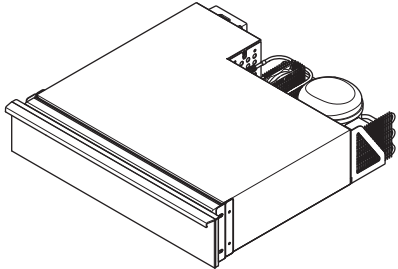

8 x ST4 x 13 mm 1x
4 x 4x 1x
1x 2 mm 1x 4 mm 1x
- Cassetto Frigo Glass Trasparente

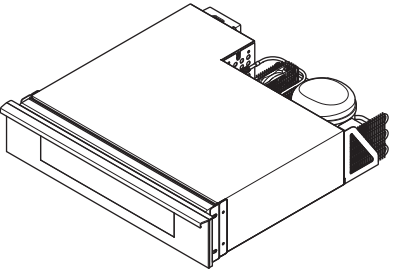


1x
1x 2 mm 1x 4 mm 1x
- Cassetto Frigo Pannellabile

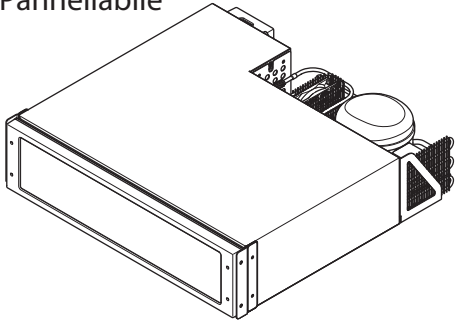


12 x ST4 x 13 mm 1x
4 x 4x 1x
1x 2 mm 1x 4 mm 1x

DIMENSIONS

- 2 Cassetto Frigo Glass Black/Trasparente

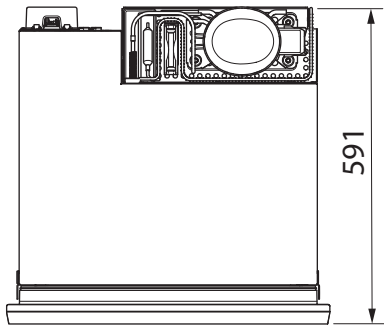


591
141
554 597
- Cassetto Frigo Pannellabile

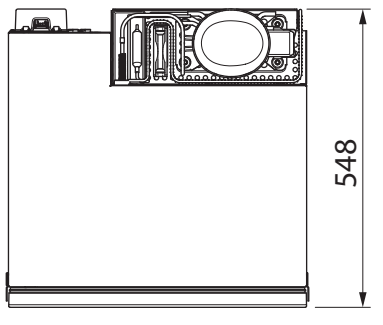


548
141
554

- 3 A

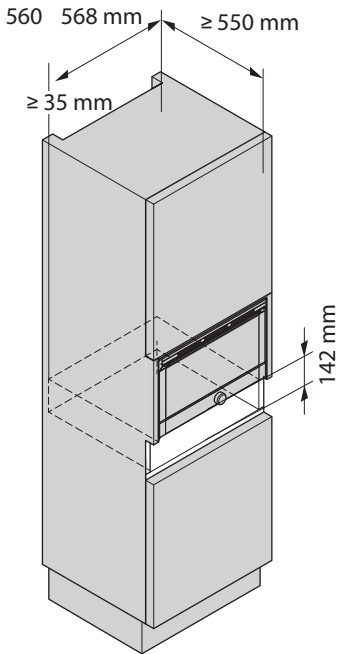


560 568 mm ≥ 550 mm
≥ 35 mm
142 mm
- B


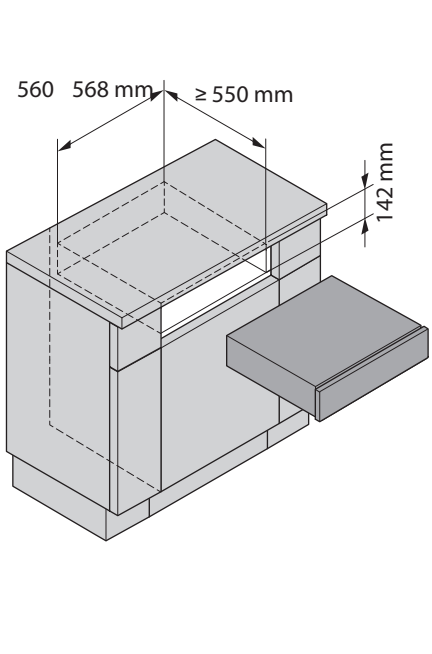


560 568 mm ≥ 550 mm
142 mm


WARNING

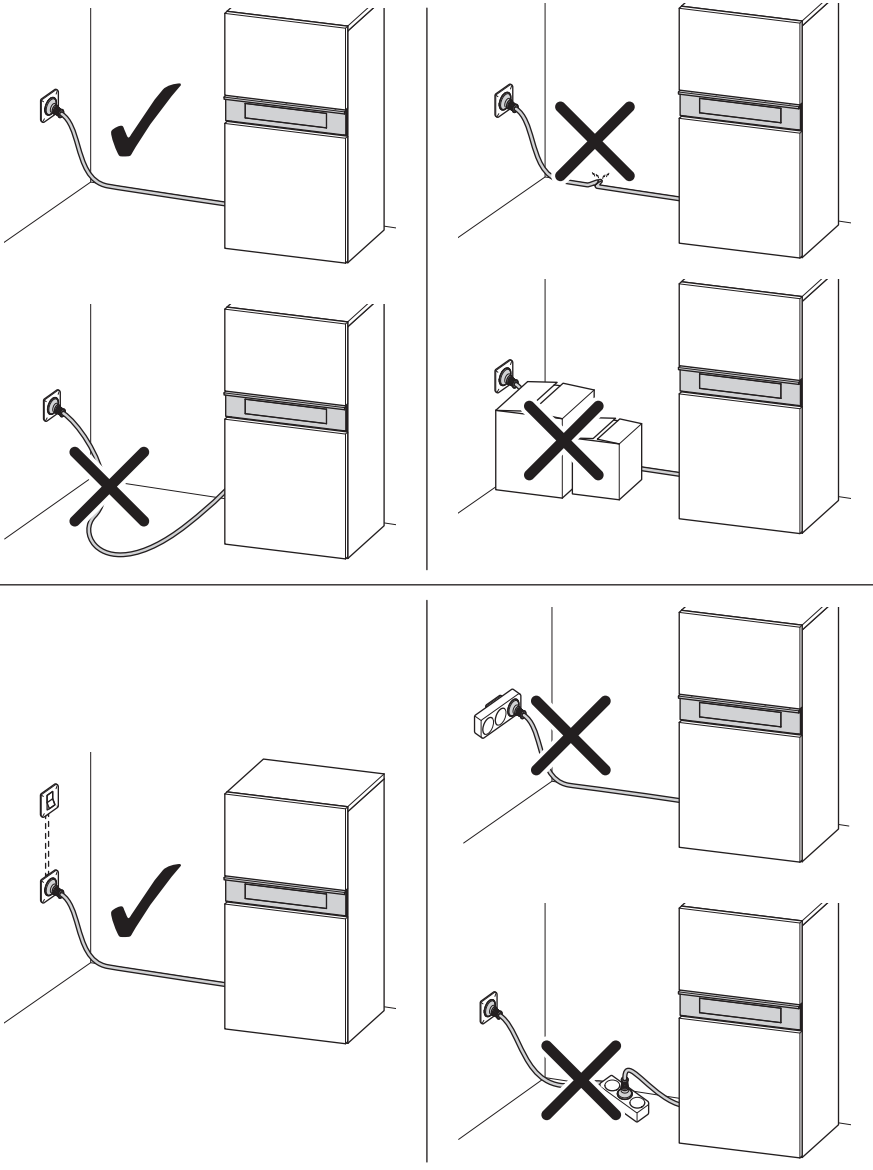- 4
- 
- Diagrams showing correct (checkmarks) and incorrect (crosses) installation methods for the refrigerator unit, including proper cable management and placement.

INSTALLATION NOTES

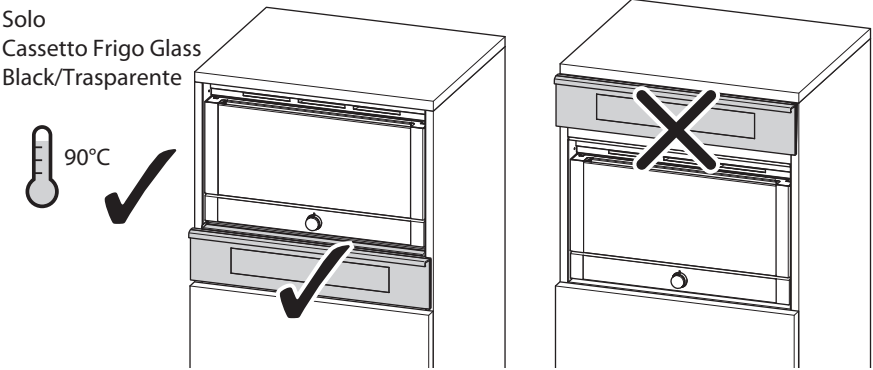- 5
- 
- Diagram showing the correct placement of the unit, ensuring it is level and properly aligned.
- 6 Solo Cassetto Frigo Glass Black/Trasparente
- 
- 90°C
Diagram showing the correct installation of the unit, ensuring it is properly sealed and aligned.

INSTALLATION

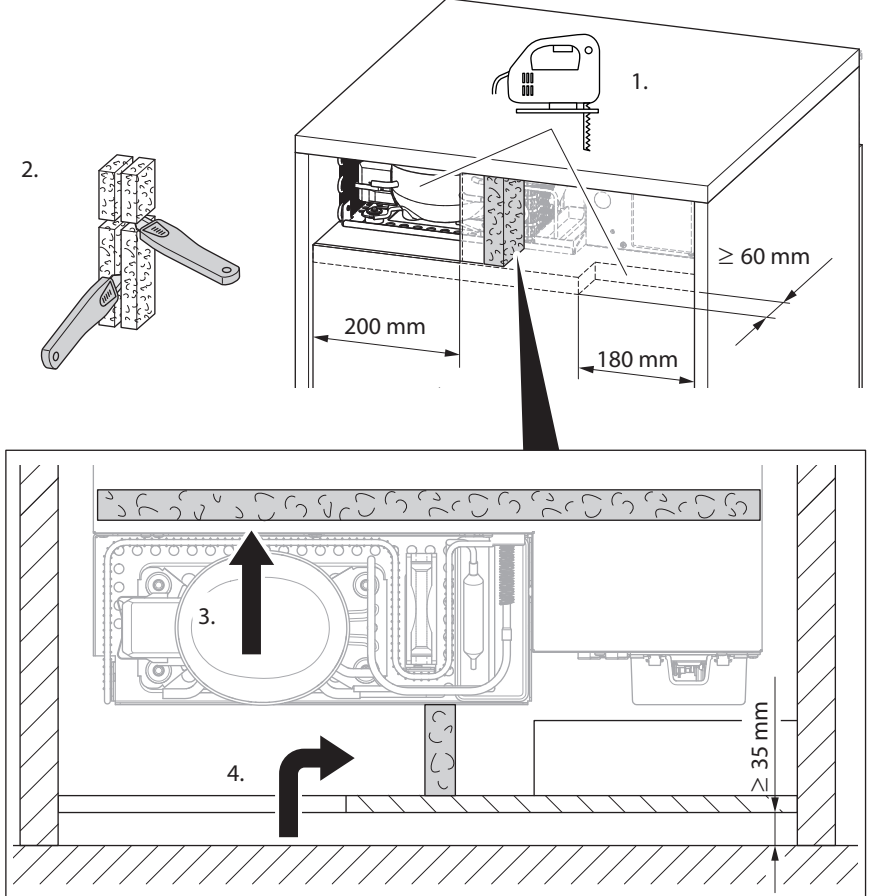- 7
- 
1. Diagram showing the unit being installed into the cabinet, with dimensions 200 mm and 180 mm indicated.
2. Diagram showing the unit being secured with screws.
3. Diagram showing the unit being connected to the power supply.
4. Diagram showing the unit being connected to the water supply.



WARNING




R600a

INSTALLATION


8

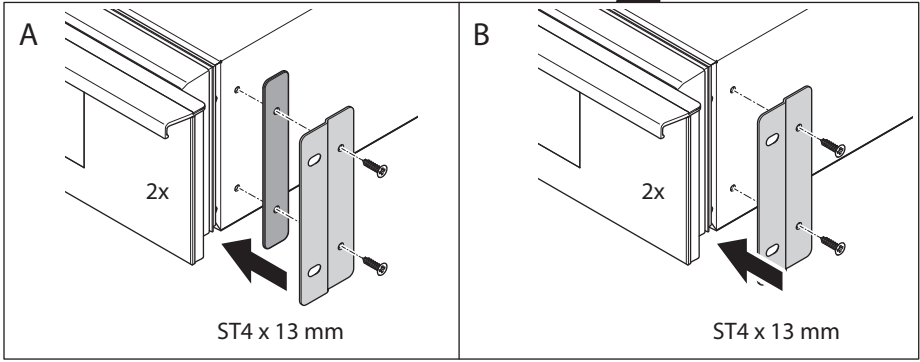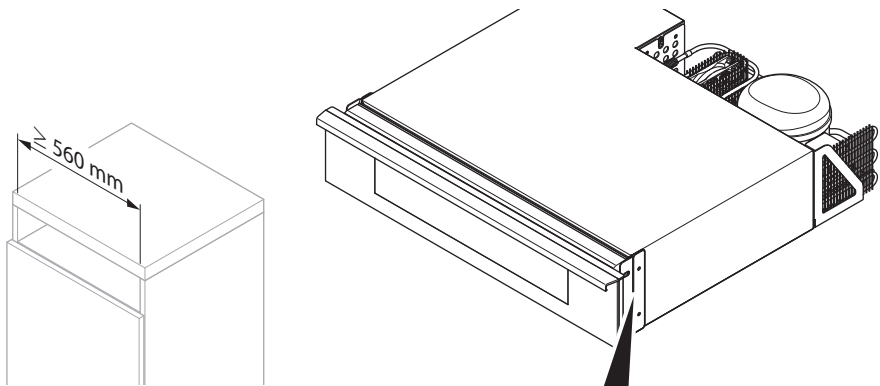


9

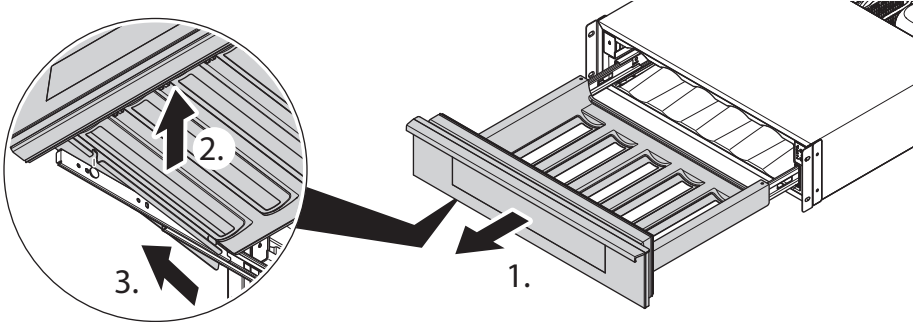

10

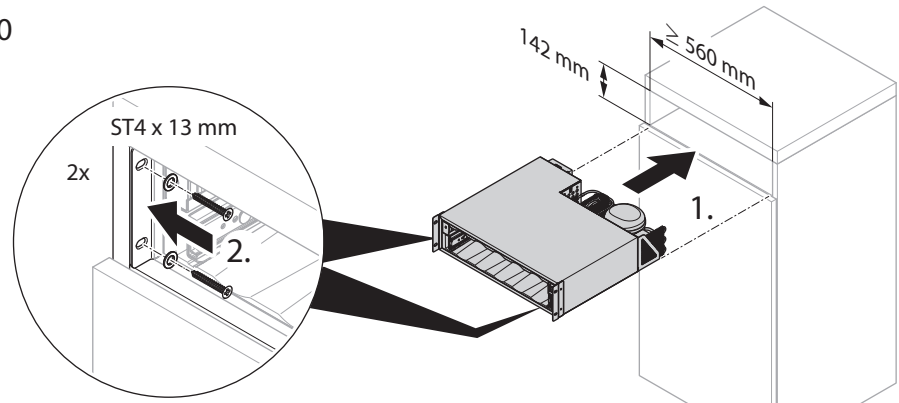


a

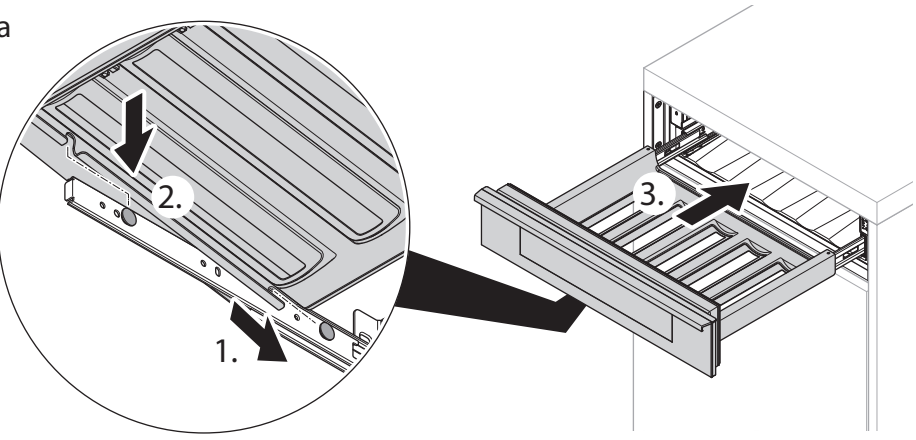


b


Solo Cassetto Frigo Pannellabile

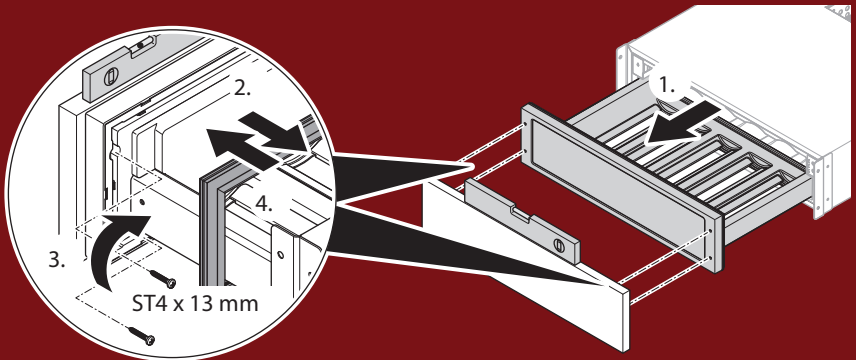

NOTE

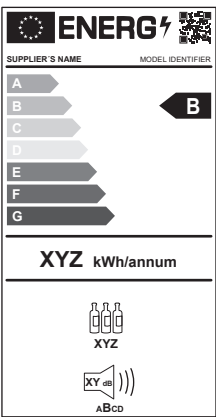

eprel.ec.europa.eu

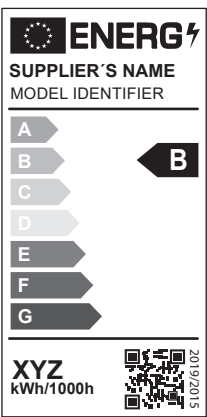

eprel.ec.europa.eu